


# AJAX

## MOTIONPROTECTPLUS



Wireless motion detector with microwave sensor that notifies the owner of first signs of home or office intrusion. Designed for rooms with air conditioners, fireplaces and where there is a likelihood of light flickering, glare and reflections.

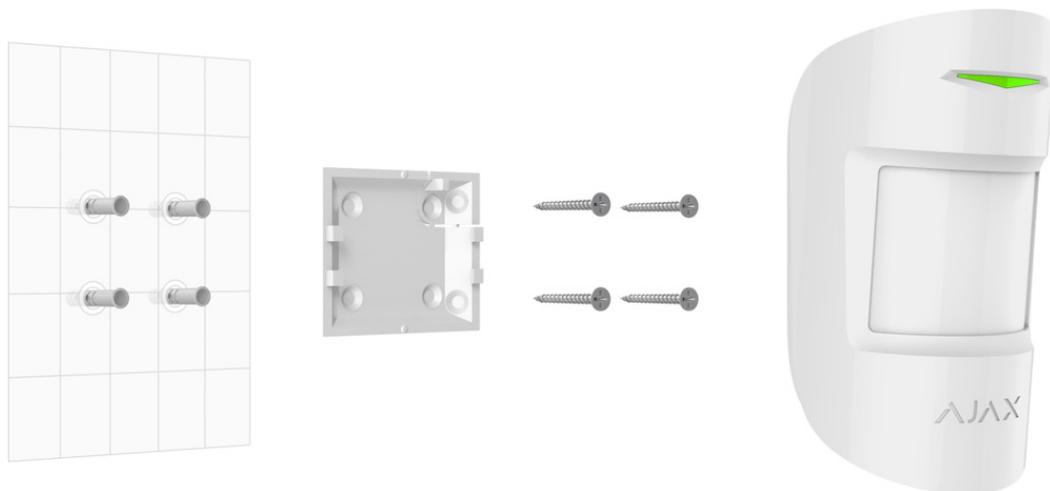

Ready to operate straight out the box. The battery is already installed inside, therefore there is no need to disassemble the detector. It can be mounted in just a few minutes using the SmartBracket mount.



## Specification

<b>Classification</b>	Electro-optical combined radio channel security detector
<b>Type of detector</b>	Wireless
<b>Installation method</b>	Indoors
<b>Compatibility</b>	Operates with Hub, Hub Plus, ReX, ocBridge Plus, uartBridge
<b>Sensing element</b>	PIR sensor, microwave sensor (24 Ghz)
<b>Alarm signal delivery time</b>	0.15 s
<b>Motion detection distance</b>	Up to 12 m
<b>Detection angles</b>	Horizontal — 88.5°, Vertical — 80°
<b>Sensitivity</b>	Adjustable, 3 levels
<b>Recommended installation height</b>	2.4 m
<b>Pet immunity</b>	Weight — up to 20 kg, Height — up to 50 cm
<b>Power supply</b>	Battery: CR123A battery, Power supply voltage: 3 V Battery life — up to 5 years
<b>Temperature sensor</b>	Available
<b>Operating temp range</b>	From +5°C to +40°C
<b>Permissible humidity</b>	Up to 75%
<b>Anti-sabotage</b>	Protection against fraud Jamming detection Tamper-resistant
<b>Remote setting and testing</b>	+
<b>Dimensions</b>	110x65x50mm
<b>Weight</b>	96 g
<b>Certification</b>	Grade 2, CE
<b>Complete set</b>	MotionProtect Plus motion detector SmartBracket mounting panel CR123A battery (pre-installed) Installation set User's guide