StreetSiren DoubleDeck
with Brandlate

Wireless outdoor siren with a clip lock
for a branded faceplate

- Two-way communication at a distance of up to 1 500 m

- Siren activation triggered by alarm in 0.3 s

- Adjustable ping interval from 12 s

- LED indication of the system state

- Adjustable volume: 85 to 113 dB

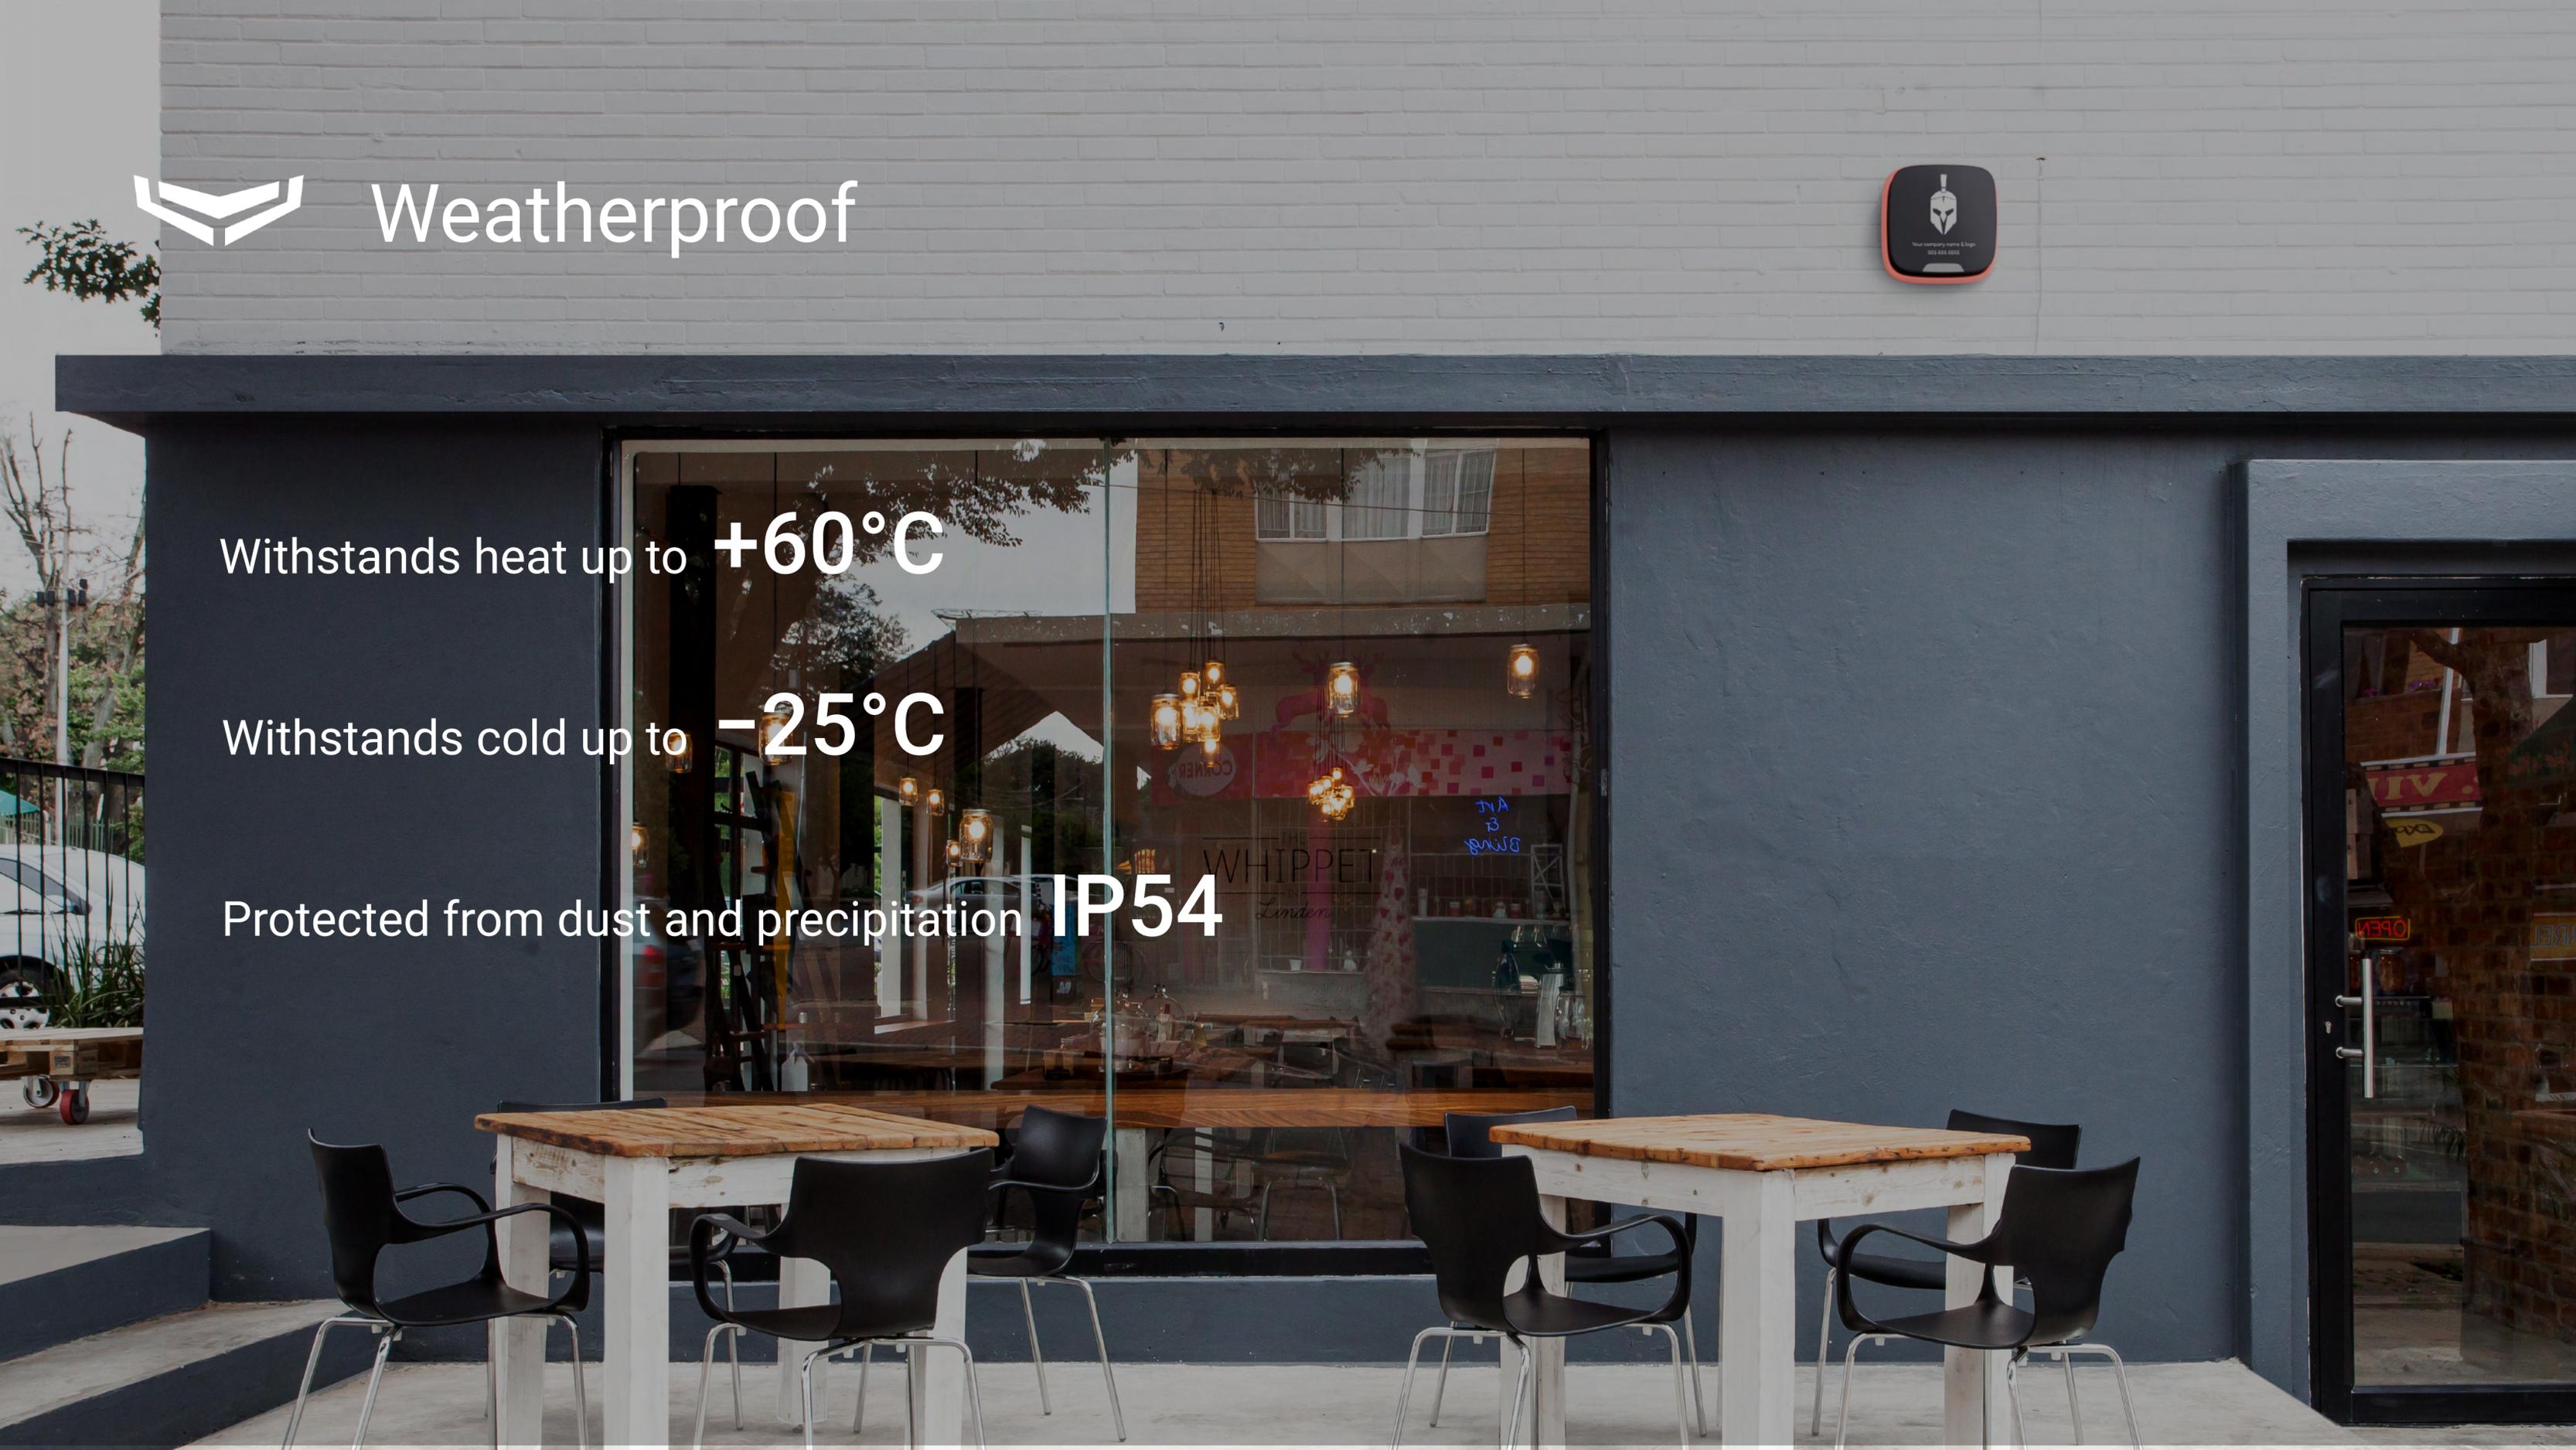**StreetSiren DoubleDeck**
with Brandplate

Weatherproof

Withstands heat up to **+60°C**

Withstands cold up to **−25°C**

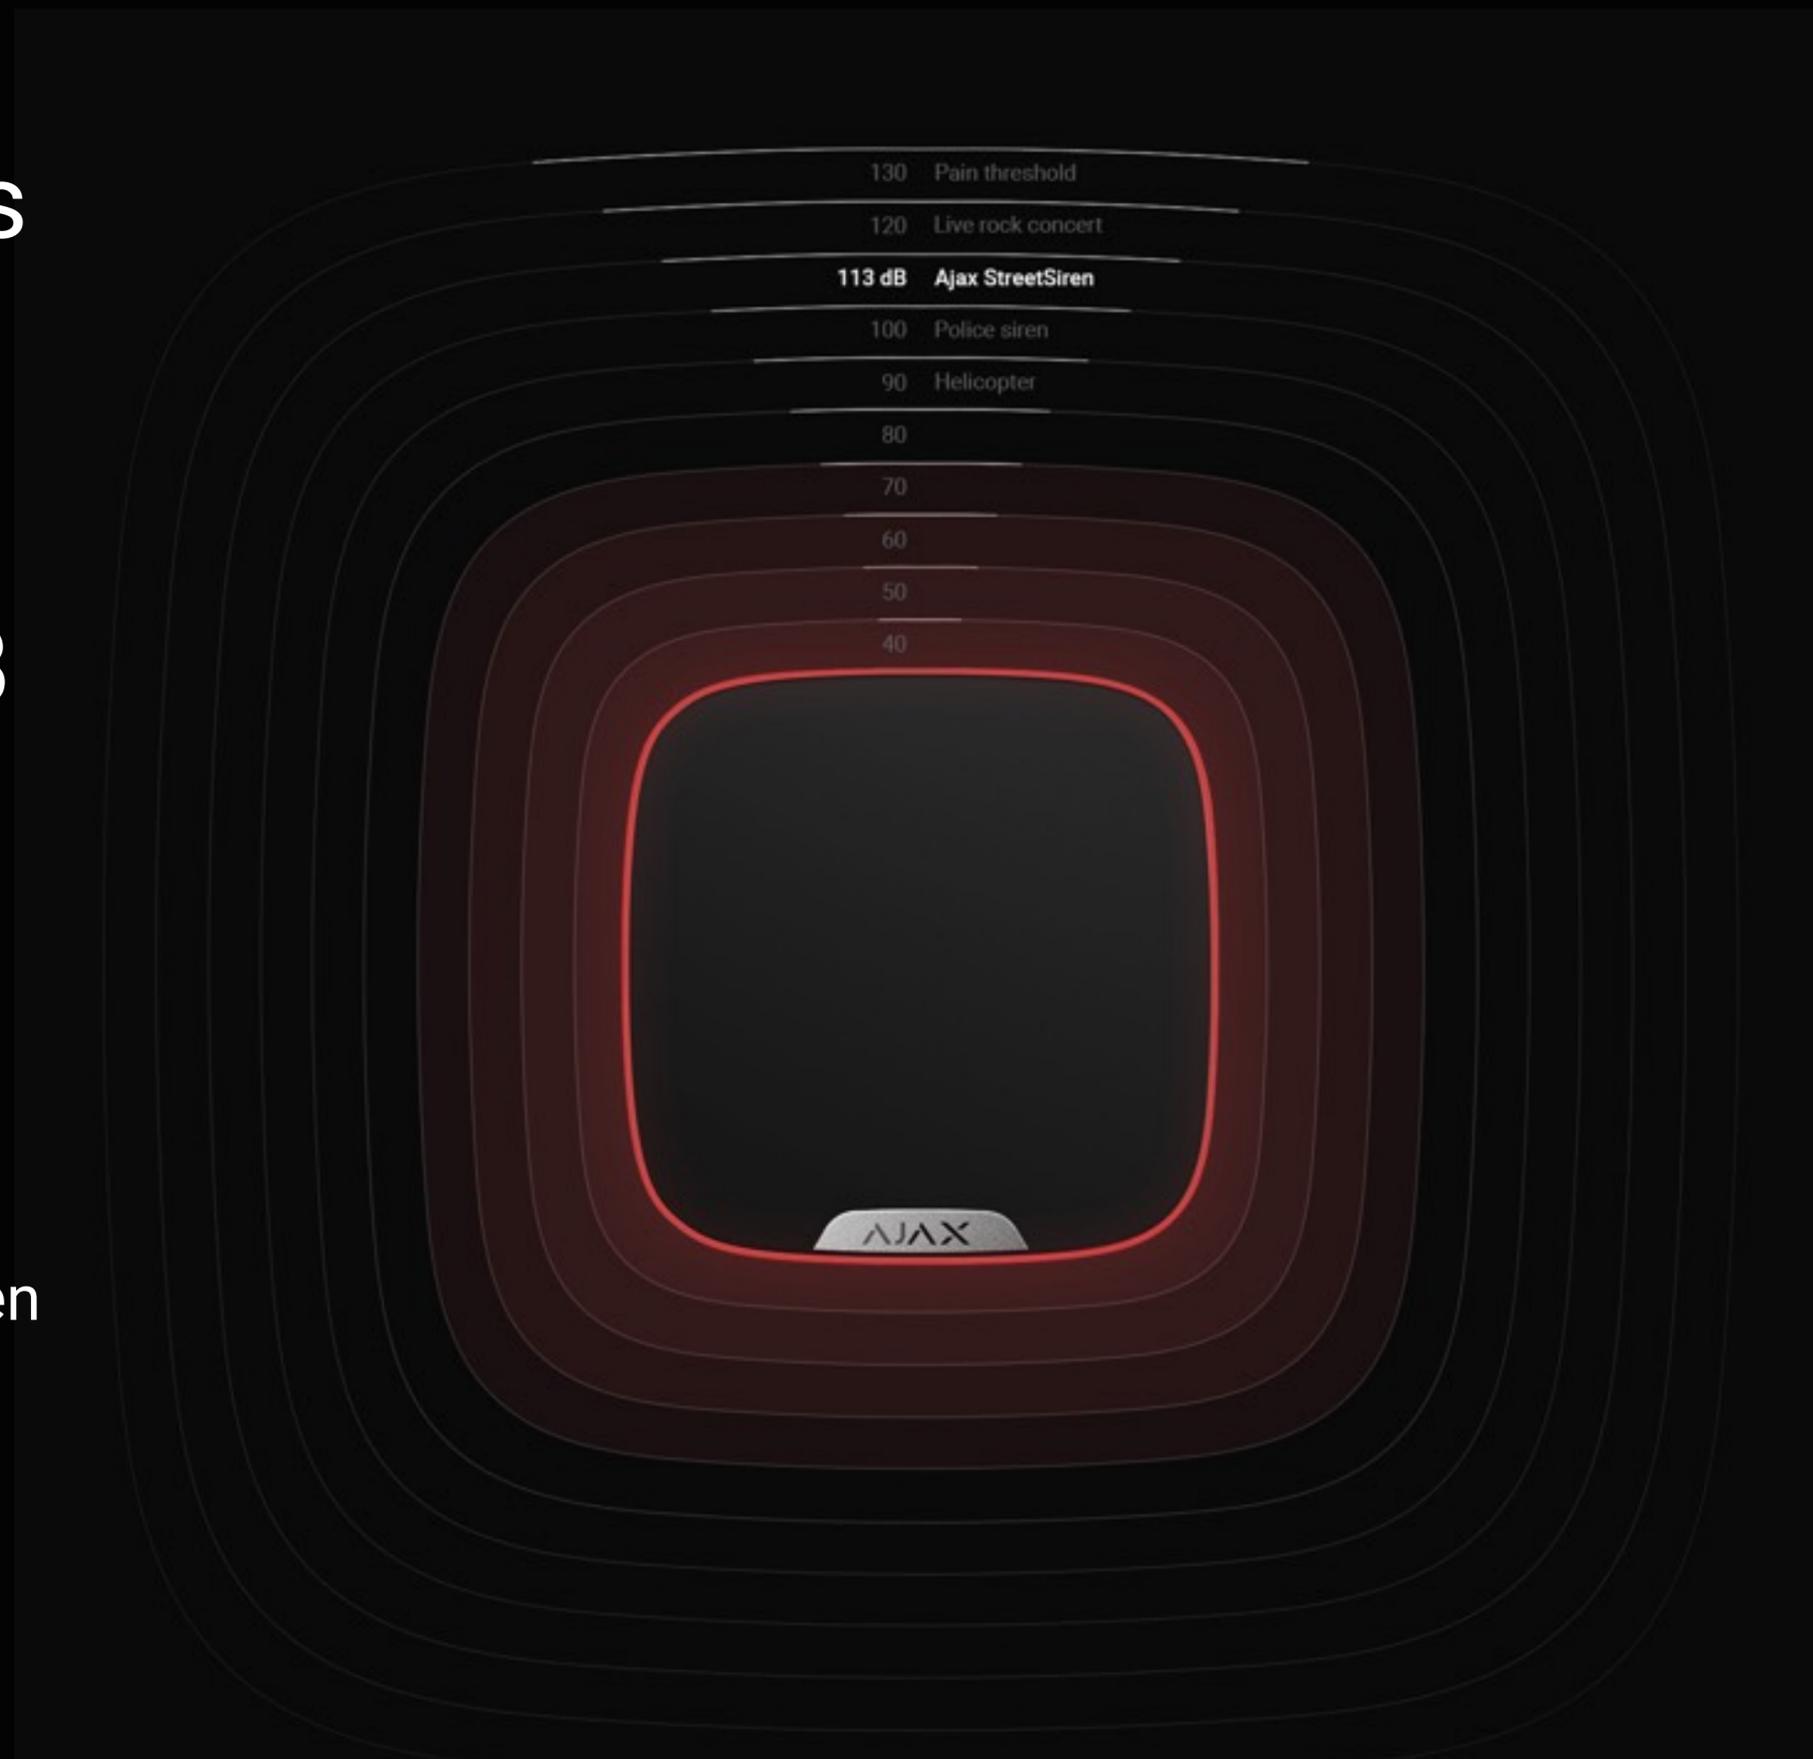Protected from dust and precipitation **IP54**

Customizable settings

Buzzer loudness level from **85** to **113 dB**

Alarm duration length from **3** to **180 s**

LED indication mode without sound

Ability to choose detectors that activate the siren

130	Pain threshold
120	Live rock concert
113 dB	**Ajax StreetSiren**
100	Police siren
90	Helicopter
80	
70	
60	
50	
40	

AJAX

Free promotion of security services

Security service providers can print their **logo** and **contact information** on the front panel of an outdoor siren

It will serve as an additional marketing channel that reaches new customers: neighbors and visitors

Your company name & logo
555-555-5555

StreetSiren DoubleDeck
with Brandplate

Brandplate secure mounting

Brandplate mounts on StreetSiren DoubleDeck using the **4 clip locks.** We also provided a possibility **to use a screw**

Even a strong wind won't tear Brandplate off the siren

How to order Brandplate

StreetSiren DoubleDeck

Comes without a cover

Brandplates

Sold in batches
One batch: 10 pcs.

Get a free printing

Order 4 batches (40 pcs)
or more and get the option to
request a free printing of your
mockup on Brandplates.

It may include company logo,
name, and contact info

Tech specs

Installation method	Outdoors/indoors
Type of notification	Sound/light
Sound volume level	Adjustable, 85–113 dB at a distance of 1 m
Alarm duration	Adjustable, 3–180 s
Indication of armed/disarmed status	Available
Battery life	Up to 5 years
Temperature sensor	Available
Operating temperature range	From −25°C to +60°C
Permissible humidity	Up to 95%
Ingress protection rating	IP54
Communication range with central unit	Up to 1,500 m in an open space
Anti-sabotage	Forgery prevention, jamming detection, tamper-resistant

Thank you