Dynamic CCTVLtd

EZHD4 Alarm IO /Audio pinouts

Dsub socket as viewed from rear of DVR

13 12 11 10 9 8 7 6 5 4 3 2 1
25 24 23 22 21 20 19 18 17 16 15 14
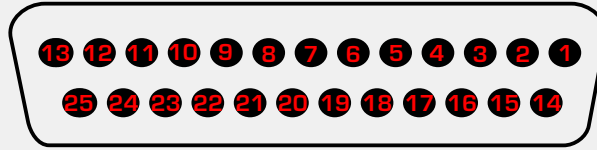
EZHD 4

Alarm I/O / Audio

Pin	Definition	Pin	Definition	Pin	Definition
1	Alarm Out Open	10	Reserved	19	Reserved
2	Alarm Out COM	11	Reserved	20	Audio 2
3	RS485 D+	12	GND	21	Audio 4
4	Alarm In 1	13	GND	22	Reserved
5	Alarm In 3	14	Alarm Out Close	23	Reserved
6	Reserved	15	RS485 D−	24	GND
7	Reserved	16	Alarm In 2	25	GND
8	Audio 1	17	Alarm In 4		
9	Audio 3	18	Reserved		